

ART2K0TFE; ART2K0TFES; ART2K0TFEG

Power LDMOS transistor

Rev. 3 — 12 February 2025

AMPLEON

Product data sheet

1. Product profile

1.1 General description

Based on Advanced Rugged Technology (ART), this 2000 W LDMOS RF power transistor has been designed to cover a wide range of applications for ISM, broadcast and communications. The unmatched transistor has a frequency range of 1 MHz to 400 MHz.

Table 1. Application information

Test signal	f	V _{DS}	P _L	G _p	η _D
	(MHz)	(V)	(W)	(dB)	(%)
CW pulsed [1]	108	65	2000	29.1	73.3

[1] Test circuit: $t_p = 100 \mu s$; $\delta = 10 \%$.

1.2 Features and benefits







- High breakdown voltage enables class E operation up to $V_{DS} = 53 \text{ V}$
- Qualified up to a maximum of $V_{DS} = 65 \text{ V}$
- Characterized from 30 V to 65 V to support a wide range of applications
- Integrated thermal sensor
- Integrated dual sided ESD protection enables class C operation and complete switch off of the transistor
- Excellent ruggedness with no device degradation
- High efficiency
- Excellent thermal stability
- Designed for broadband operation
- For RoHS compliance see the product details on the Ampleon website

1.3 Applications

- Industrial, scientific and medical applications
 - ◆ Plasma generators
 - ◆ MRI systems
 - ◆ CO₂ lasers
 - ◆ Particle accelerators
- Broadcast
 - ◆ FM radio
 - ◆ VHF TV
- Communications
 - ◆ Non cellular communications
 - ◆ UHF radar

2. Pinning information

Table 2. Pinning

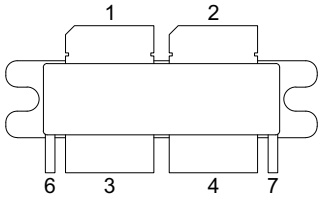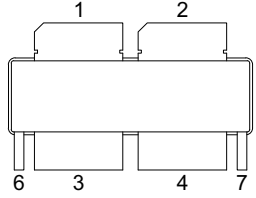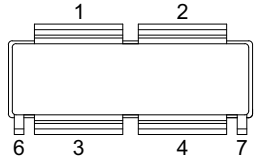Pin	Description	Simplified outline	Graphic symbol
ART2K0TFE (ACC-1230-6F-3)			
1	drain1		 <small>amn11704</small>
2	drain2		
3	gate1		
4	gate2		
5	source [1]		
6	temperature sense FET1 [2]		
7	temperature sense FET2 [2]		
ART2K0TFES (ACC-1230-6F-2)			
1	drain1		 <small>amp01794</small>
2	drain2		
3	gate1		
4	gate2		
5	source [1]		
6	temperature sense FET1 [2]		
7	temperature sense FET2 [2]		
ART2K0TFEG (ACC-1230-6G-2)			
1	drain1		 <small>amp01794</small>
2	drain2		
3	gate1		
4	gate2		
5	source [1]		
6	temperature sense FET1 [2]		
7	temperature sense FET2 [2]		

[1] Connected to flange.

[2] The ART2K0TFE, ART2K0TFES and ART2K0TFEG are equipped with a thermal sense FET and can be used to sense the die temperature during operation of the device. This thermal FET is electrically disconnected from the RF power FETs on the die and share only a common ground. The sensor is operated by applying a fixed voltage to its input pin and monitor the current, which is temperature depended.

3. Ordering information

Table 3. Ordering information

Package name	Orderable part number	12NC	Packing description	Min. orderable quantity (pieces)
ACC-1230-6F-3	ART2K0TFEJ	9349 607 63118	TR13; 100-fold; 56 mm; non-dry pack	100
ACC-1230-6F-2	ART2K0TFESJ	9349 606 36118	TR13; 100-fold; 56 mm; non-dry pack	100
ACC-1230-6G-2	ART2K0TFEGJ	9349 606 35118	TR13; 100-fold; 56 mm; non-dry pack	100

4. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
V_{DS}	drain-source voltage	[1]	-	200	V
V_{GS}	gate-source voltage		-9	+13	V
V_{TS}	temperature sensor voltage		-9	+5.5	V
T_{stg}	storage temperature		-65	+150	°C
T_j	junction temperature	[2]	-	225	°C

[1] Specified over lifetime at maximum operating temperature.

[2] Continuous use at maximum temperature will affect the reliability, for details refer to the online MTF calculator.

5. Thermal characteristics


Table 5. Thermal characteristics

According to standard MIL-STD-883E.

Symbol	Parameter	Conditions	Typ	Unit
$R_{th(j-c)}$	thermal resistance from junction to case	$T_j = 95\text{ °C}$, measured under RF condition [1][2]	0.077	K/W

[1] Refer to application note AN221014 on the Ampleon website.

[2] See [Figure 1](#).

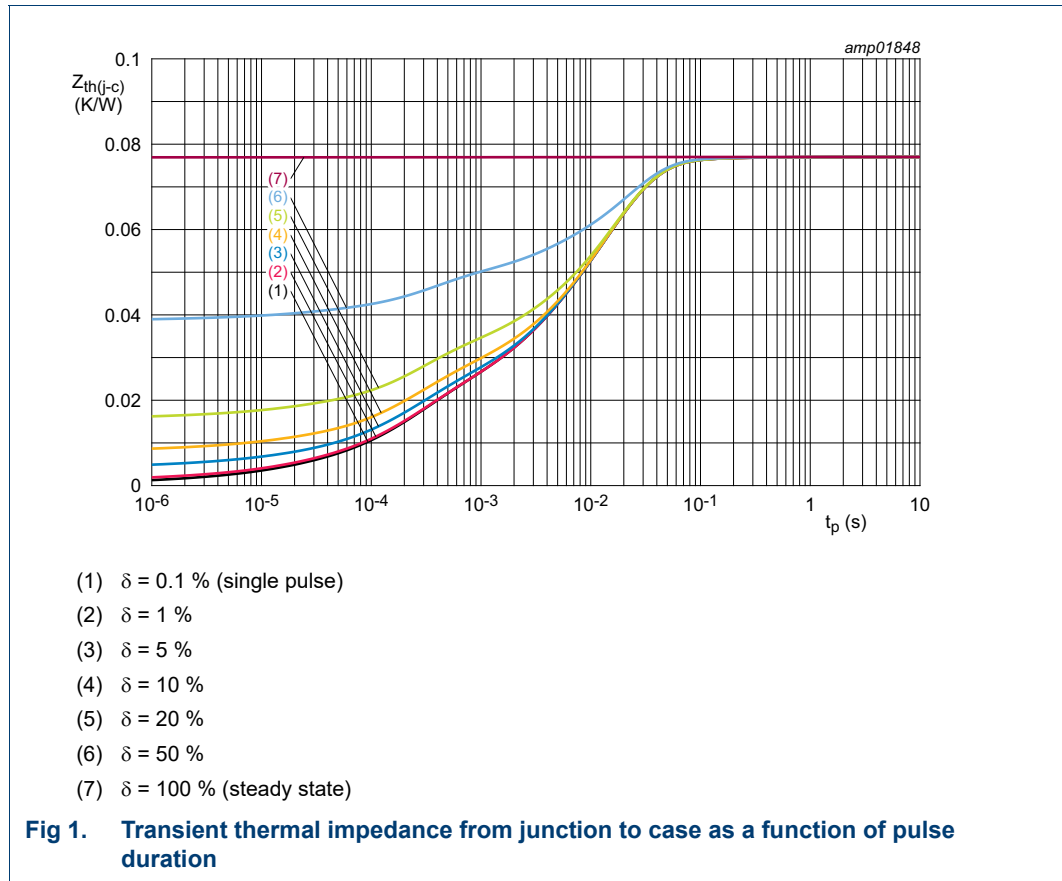

6. Characteristics

Table 6. DC characteristics

$T_j = 25 \text{ }^\circ\text{C}$; per section unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{(BR)DSS}$	drain-source breakdown voltage	$V_{GS} = 0 \text{ V}$; $I_D = 5.5 \text{ mA}$	203	208	-	V
$V_{GS(th)}$	gate-source threshold voltage	$V_{DS} = 20 \text{ V}$; $I_D = 550 \text{ mA}$	1.6	2.1	2.6	V
$V_{TS(th)}$	temperature sensor threshold voltage	$I_{TS} = 0.7 \text{ mA}$	1.75	2.3	2.75	V
I_{DSS}	drain leakage current	$V_{GS} = 0 \text{ V}$; $V_{DS} = 65 \text{ V}$	-	-	2.8	μA
I_{DSX}	drain cut-off current	$V_{GS} = V_{GS(th)} + 3.75 \text{ V}$; $V_{DS} = 20 \text{ V}$	-	76	-	A
I_{GSS}	gate leakage current	$V_{GS} = 11 \text{ V}$; $V_{DS} = 0 \text{ V}$	-	-	280	nA
$R_{DS(on)}$	drain-source on-state resistance	$V_{GS} = V_{GS(th)} + 3.75 \text{ V}$; $I_D = 19.25 \text{ A}$	-	0.107	-	Ω

Table 7. AC characteristics

$T_j = 25\text{ }^{\circ}\text{C}$; per section unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
C_{rs}	feedback capacitance	$V_{GS} = 0\text{ V}$; $V_{DS} = 65\text{ V}$; $f = 1\text{ MHz}$	-	1.88	-	pF
C_{iss}	input capacitance	$V_{GS} = 0\text{ V}$; $V_{DS} = 65\text{ V}$; $f = 1\text{ MHz}$	-	598	-	pF
C_{oss}	output capacitance	$V_{GS} = 0\text{ V}$; $V_{DS} = 65\text{ V}$; $f = 1\text{ MHz}$	-	179	-	pF

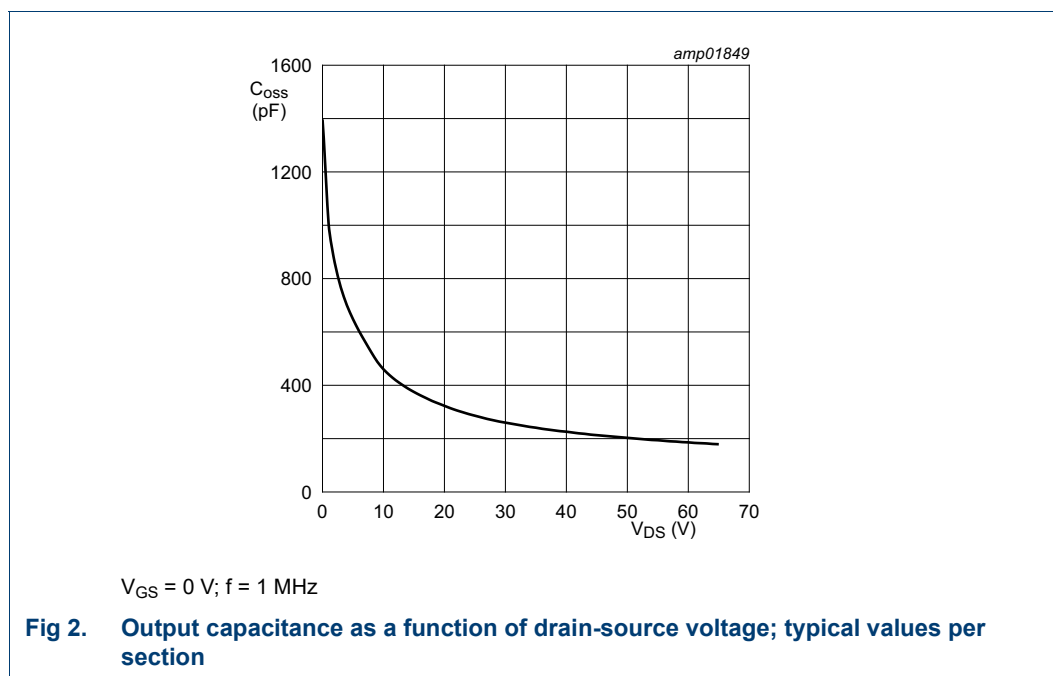


Table 8. RF characteristics

Test signal: pulsed RF; $t_p = 100\text{ }\mu\text{s}$; $\delta = 5\text{ }\%$; $f = 108\text{ MHz}$; RF performance at $V_{DS} = 65\text{ V}$; $I_{Dq} = 50\text{ mA}$ per section; $T_{case} = 25\text{ }^{\circ}\text{C}$; unless otherwise specified; in a class-AB production test circuit.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
G_p	power gain	$P_L = 2000\text{ W}$	27	29	-	dB
RL_{in}	input return loss	$P_L = 2000\text{ W}$	-	-15	-	dB
η_D	drain efficiency	$P_L = 2000\text{ W}$	68	73	-	%

7. Test information

7.1 Ruggedness in class-AB operation

The ART2K0TFE, ART2K0TFES and ART2K0TFEG are capable of withstanding a load mismatch corresponding to $VSWR \geq 65 : 1$ through all phases under the following conditions: $V_{DS} = 65\text{ V}$; $I_{Dq} = 100\text{ mA}$ per section; $P_L = 2000\text{ W}$ pulsed; $t_p = 100\text{ }\mu\text{s}$; $\delta = 10\text{ }\%$; $f = 108\text{ MHz}$.

7.2 Impedance information


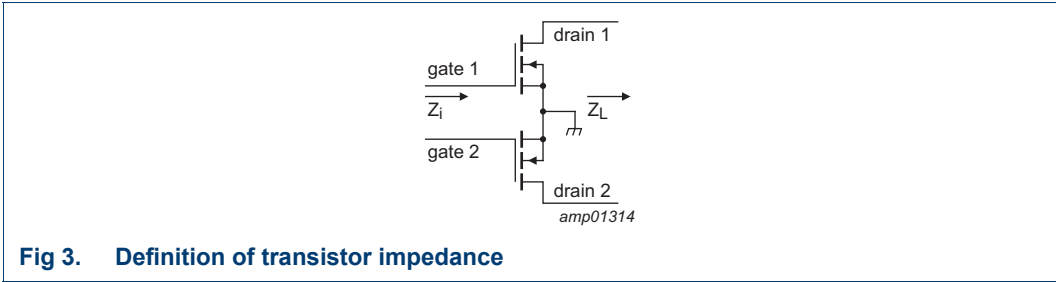


Table 9. Typical push-pull impedance
Simulated Z_i and Z_L device impedance; impedance info at $V_{DS} = 65\text{ V}$ and $P_L = 2000\text{ W}$.

f	Z_i	Z_L
(MHz)	(Ω)	(Ω)
108	$2.4 - j8.9$	$3.9 + j1.0$

7.3 Graphical data thermal sensor

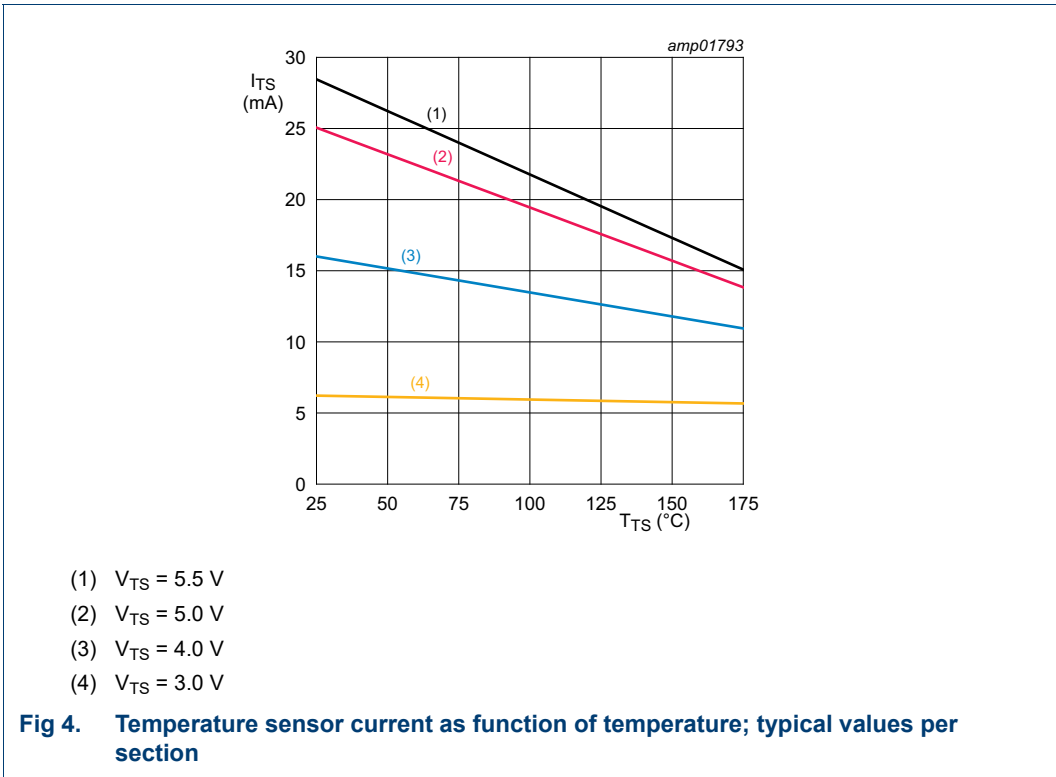

7.4 Test circuit

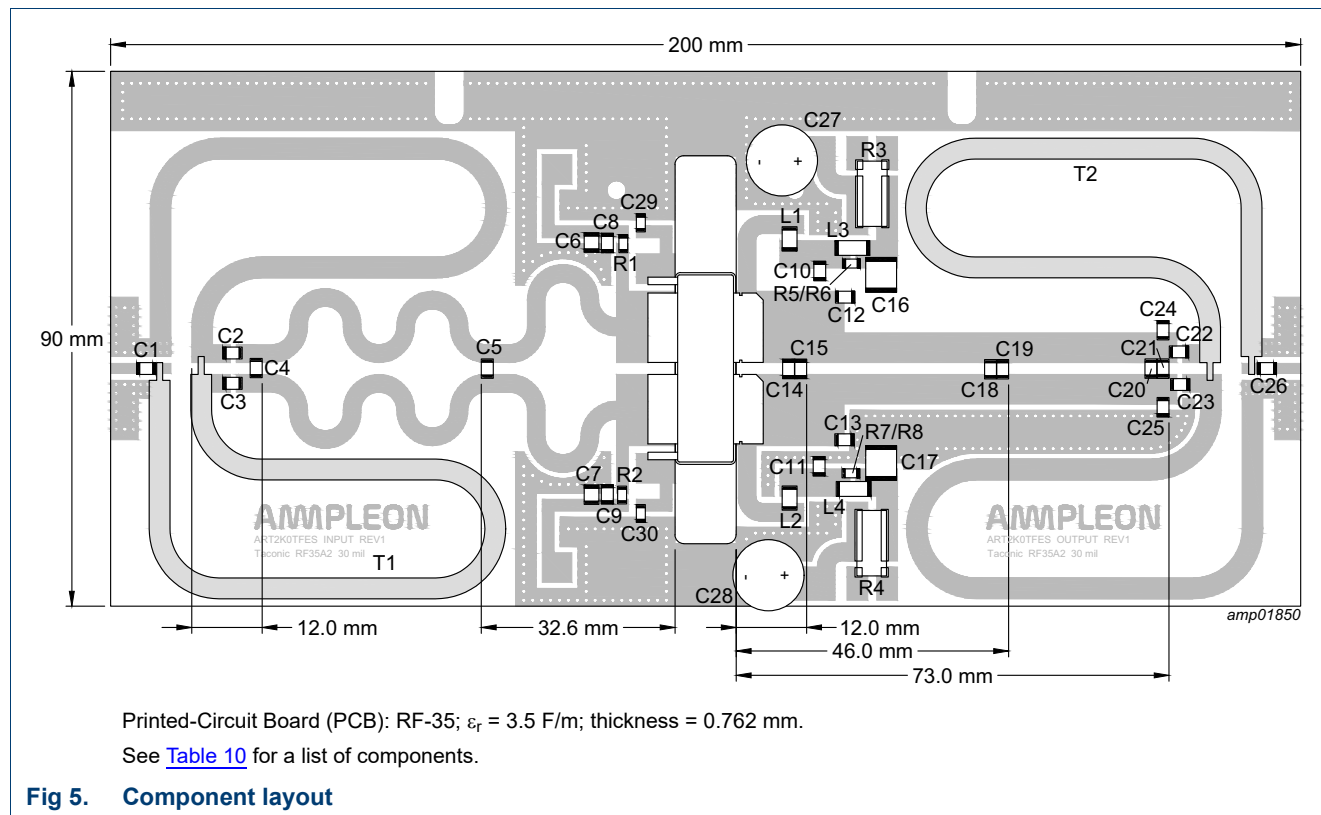


Table 10. List of components

For test circuit see [Figure 5](#).


Component	Description	Value	Remarks
C1, C26	multilayer ceramic chip capacitor	470 pF [1]	
C2, C3	multilayer ceramic chip capacitor	68 pF [1]	
C4	multilayer ceramic chip capacitor	43 pF [1]	
C5	multilayer ceramic chip capacitor	240 pF [1]	
C6, C7	multilayer ceramic chip capacitor	4.7 μ F, 50 V	Murata: GRM32ER71H475KA88L
C8, C9, C10, C11	multilayer ceramic chip capacitor	820 pF [1]	
C12, C13	multilayer ceramic chip capacitor	180 pF [1]	
C14, C15	multilayer ceramic chip capacitor	39 pF [1]	
C16, C17	multilayer ceramic chip capacitor	4.7 μ F, 100 V	TDK: C5750X7R2A475KT/A
C18, C19	multilayer ceramic chip capacitor	56 pF [1]	
C20, C21	multilayer ceramic chip capacitor	51 pF [1]	
C22, C23	multilayer ceramic chip capacitor	120 pF [1]	
C24, C25	multilayer ceramic chip capacitor	20 pF [1]	
C27, C28	electrolytic capacitor	2200 μ F, 100 V	
C29, C30	multilayer ceramic chip capacitor	1 μ F, 25 V	SMD 1206
L1, L2	square air core inductor	47 nH	Coilcraft: 1515SQ-47N
L3, L4	square air core inductor	82 nH	Coilcraft: 1515SQ-82N


Table 10. List of components ...continued
For test circuit see Figure 5.

Component	Description	Value	Remarks
R1, R2	chip resistor	4.7 kΩ	SMD 1206
R3, R4	chip resistor	0.01 Ω	FC4L110R010FER
R5, R6, R7, R8	chip resistor	9.1 Ω	SMD 1206
T1, T2	semi rigid coax	50 Ω, 160 mm	EZ141-AL-TP/M17

[1] American Technical Ceramics type 100B or capacitor of same quality.

7.5 Graphical data

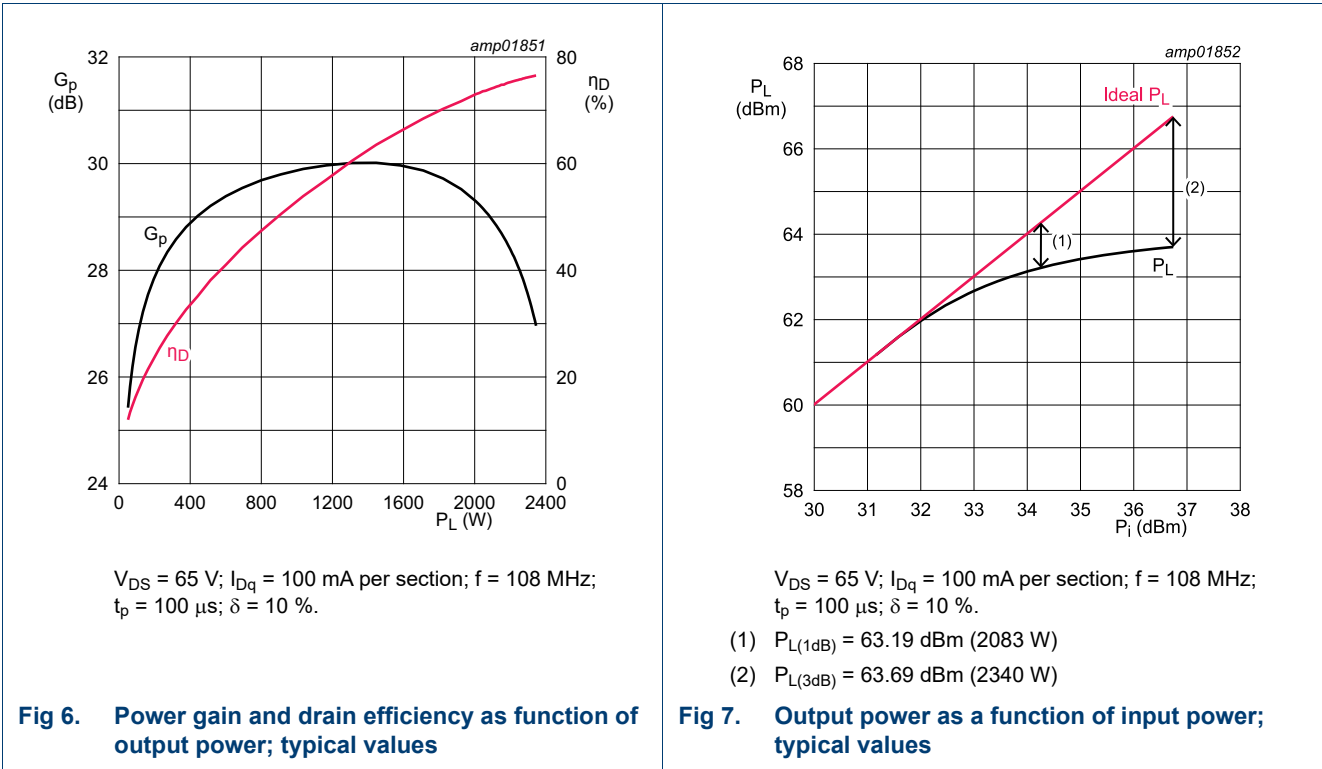


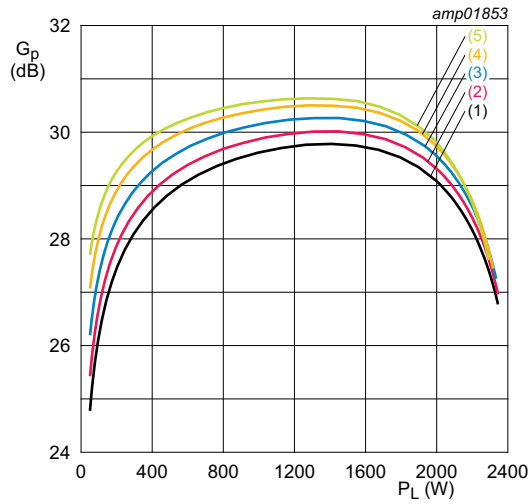

$V_{DS} = 65 \text{ V}$; $f = 108 \text{ MHz}$; $t_p = 100 \text{ } \mu\text{s}$; $\delta = 10 \text{ } \%$.

- (1) $I_{Dq} = 50 \text{ mA per section}$
- (2) $I_{Dq} = 100 \text{ mA per section}$
- (3) $I_{Dq} = 200 \text{ mA per section}$
- (4) $I_{Dq} = 400 \text{ mA per section}$
- (5) $I_{Dq} = 600 \text{ mA per section}$


Fig 8. Power gain as a function of output power; typical values

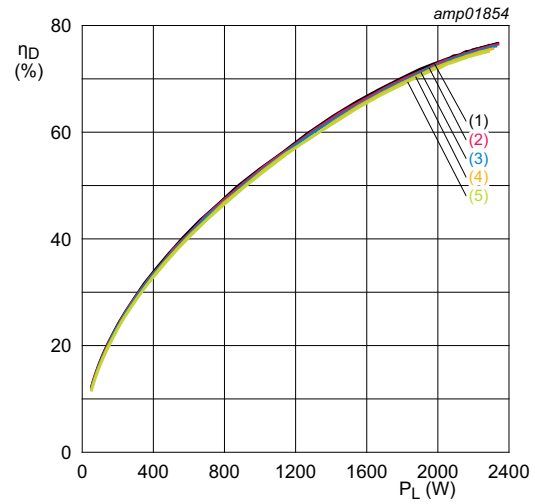

$V_{DS} = 65 \text{ V}$; $f = 108 \text{ MHz}$; $t_p = 100 \text{ } \mu\text{s}$; $\delta = 10 \text{ } \%$.

- (1) $I_{Dq} = 50 \text{ mA per section}$
- (2) $I_{Dq} = 100 \text{ mA per section}$
- (3) $I_{Dq} = 200 \text{ mA per section}$
- (4) $I_{Dq} = 400 \text{ mA per section}$
- (5) $I_{Dq} = 600 \text{ mA per section}$


Fig 9. Drain efficiency as a function of output power; typical values

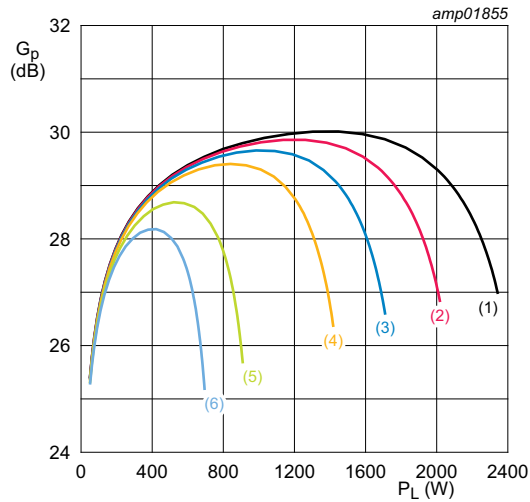

$I_{DQ} = 100$ mA per section; $f = 108$ MHz; $t_p = 100$ μ s;
 $\delta = 10$ %.

- (1) $V_{DS} = 65$ V
- (2) $V_{DS} = 60$ V
- (3) $V_{DS} = 55$ V
- (4) $V_{DS} = 50$ V
- (5) $V_{DS} = 40$ V
- (6) $V_{DS} = 30$ V

Fig 10. Power gain as a function of output power; typical values

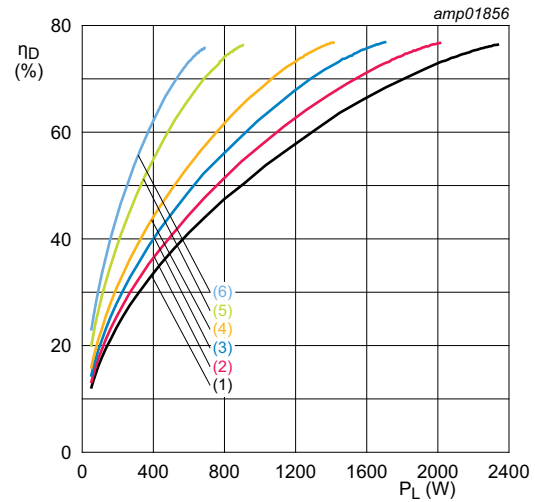

$I_{DQ} = 100$ mA per section; $f = 108$ MHz; $t_p = 100$ μ s;
 $\delta = 10$ %.

- (1) $V_{DS} = 65$ V
- (2) $V_{DS} = 60$ V
- (3) $V_{DS} = 55$ V
- (4) $V_{DS} = 50$ V
- (5) $V_{DS} = 40$ V
- (6) $V_{DS} = 30$ V

Fig 11. Drain efficiency as a function of output power; typical values

8. Package outline

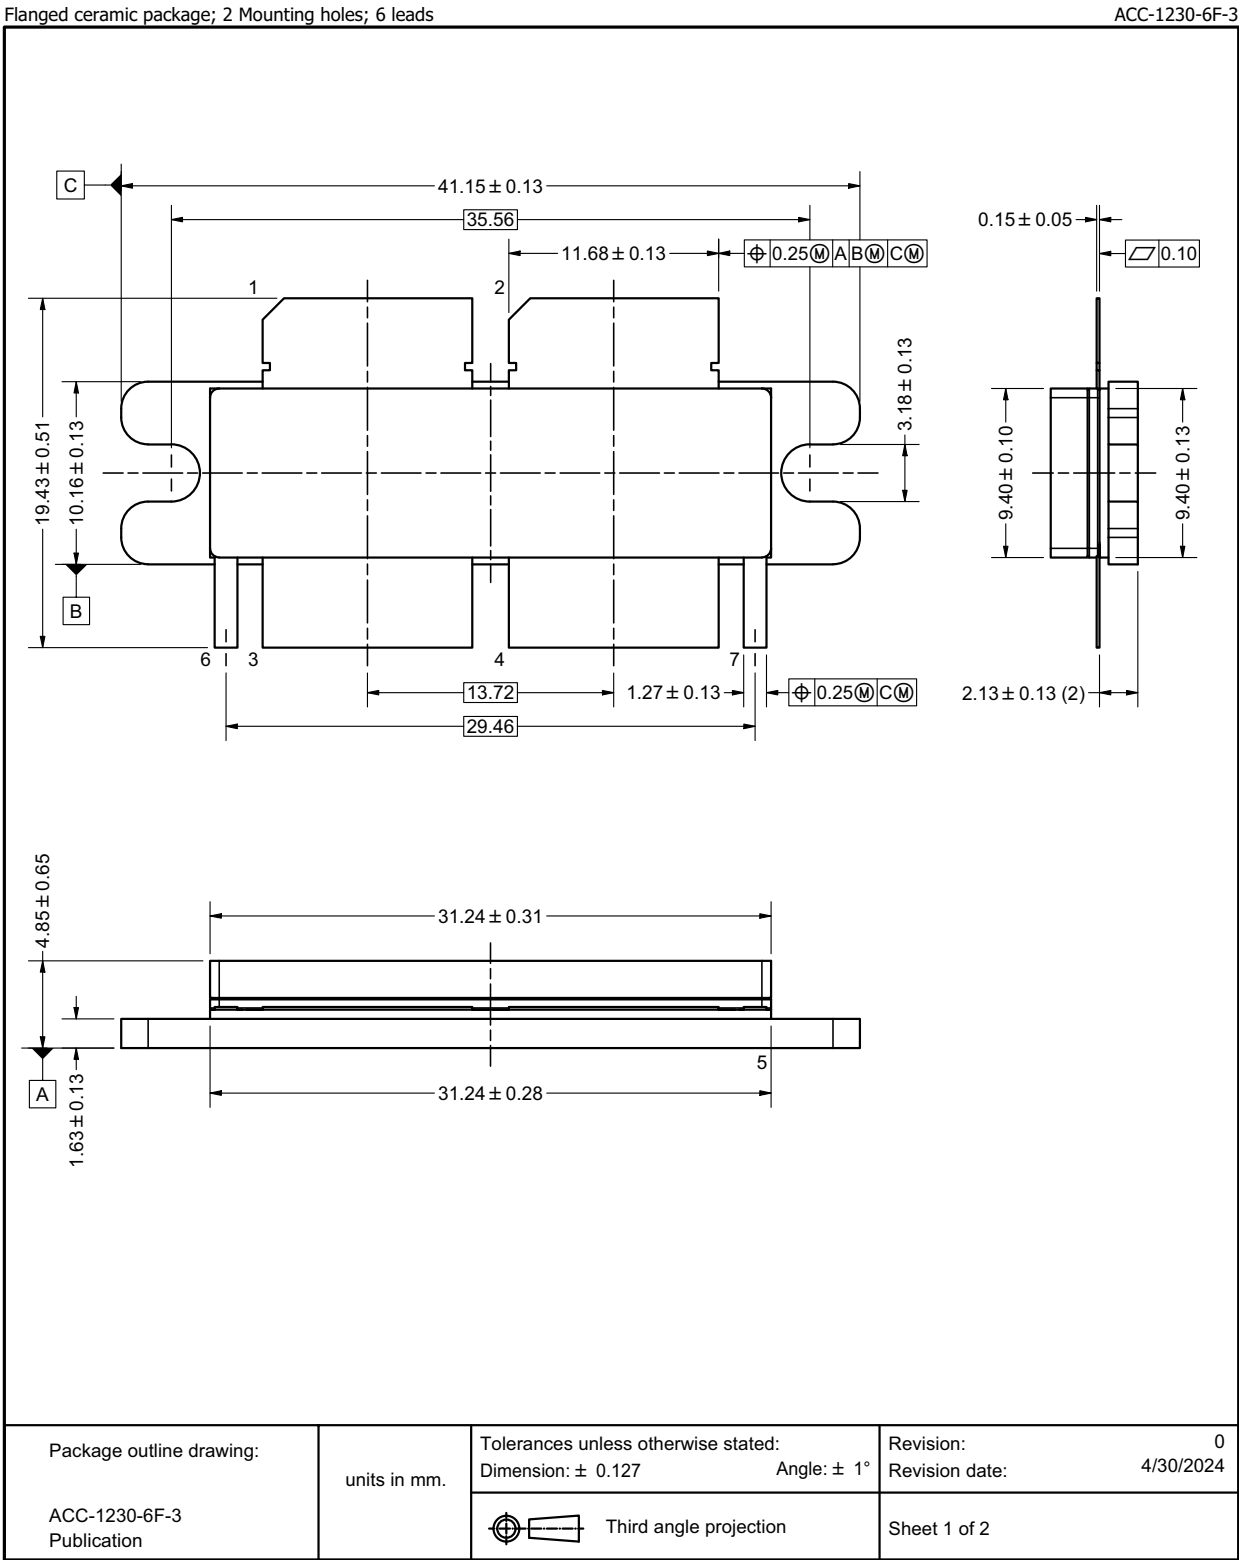


Fig 12. Package outline ACC-1230-6F-3 (sheet 1 of 2)

ACC-1230-6F-3

Drawing Notes			
Items	Description		
(1)	Millimeter dimensions are derived from the original inch dimensions.		
(2)	Dimension is measured 0.030 inch (0.76 mm) from the body.		
(3)	Recommended screw pitch dimension of 1.48 inch (37.52 mm) based on M3 screw.		


Package outline drawing: ACC-1230-6F-3 Publication	units in mm.	Tolerances unless otherwise stated: Dimension: ± 0.127 Angle: $\pm 1^\circ$	Revision: 0 Revision date: 4/30/2024
		 Third angle projection	Sheet 2 of 2

Fig 13. Package outline ACC-1230-6F-3 (sheet 2 of 2)

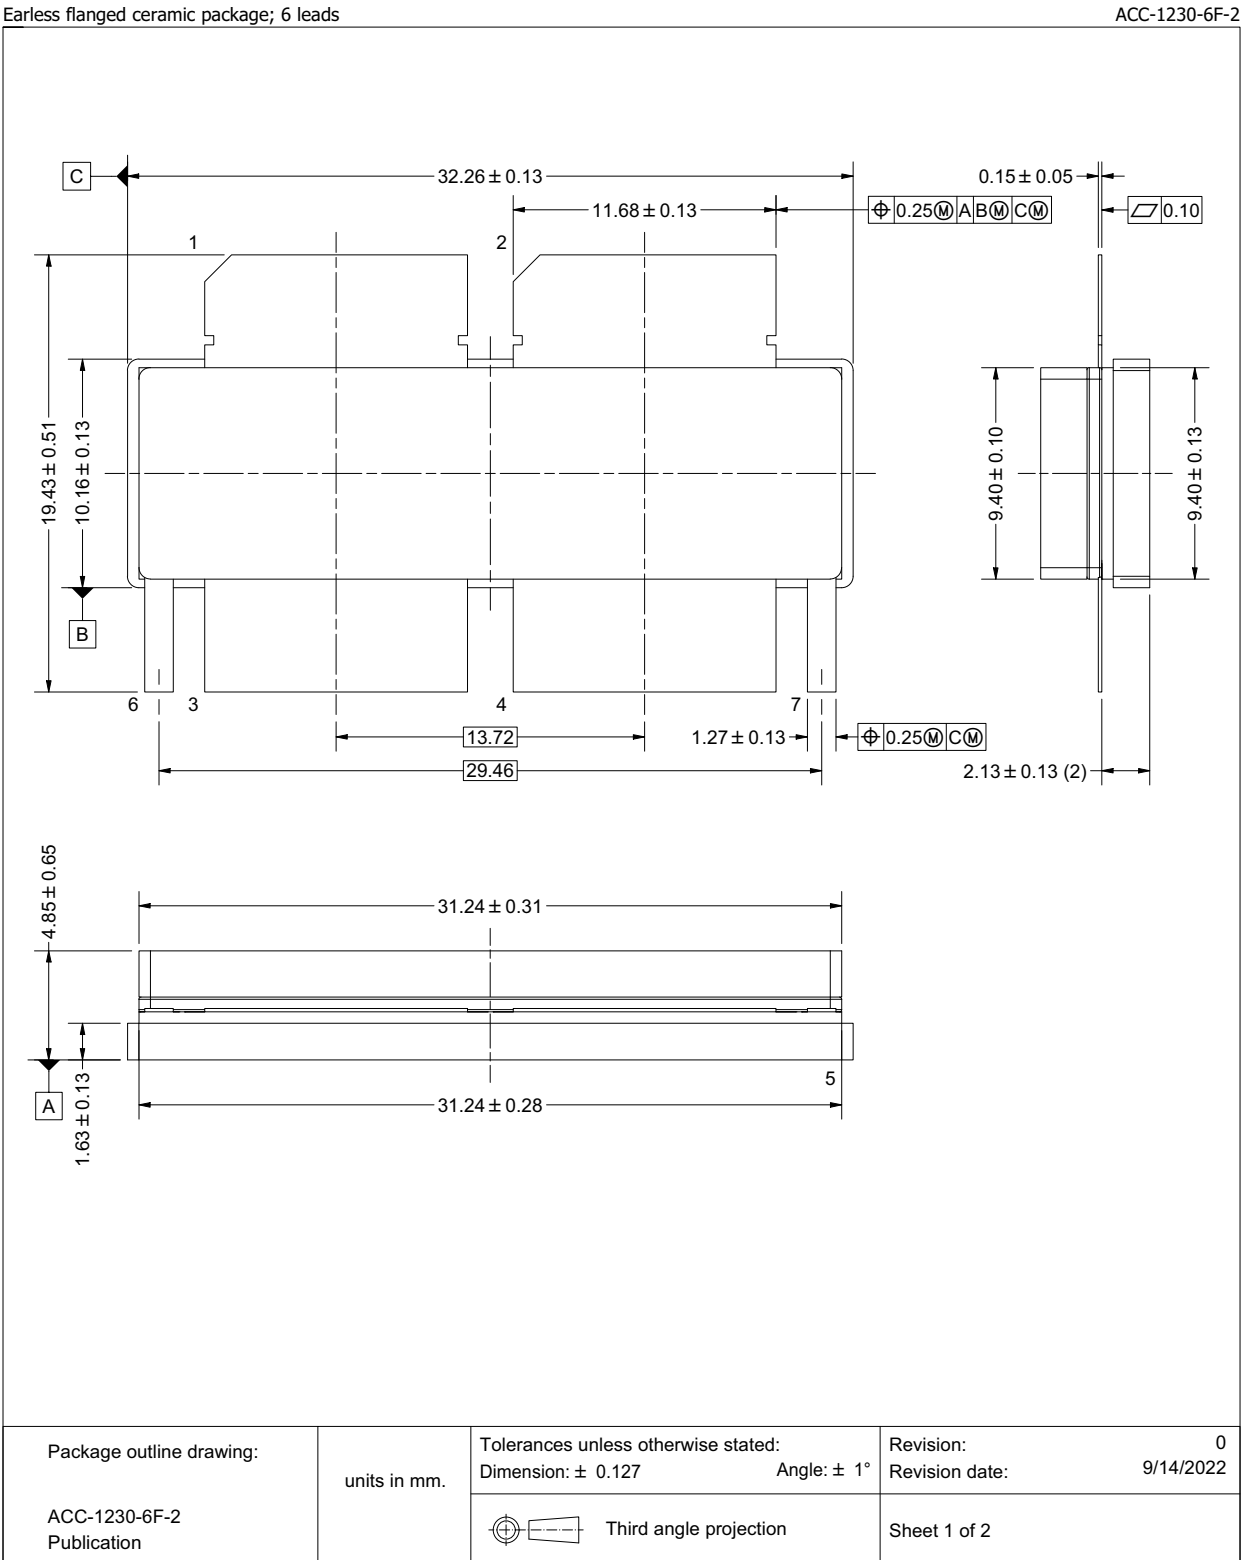


Fig 14. Package outline ACC-1230-6F-2 (sheet 1 of 2)

ACC-1230-6F-2

Drawing Notes			
Items	Description		
(1)	Millimeter dimensions are derived from the original inch dimensions.		
(2)	Dimension is measured 0.030 inch (0.76) from the body.		

Package outline drawing:

ACC-1230-6F-2
Publication

units in mm.

Third angle projection

Tolerances unless otherwise stated:

Dimension: ± 0.127

Angle: $\pm 1^\circ$

Revision:

Revision date:

0

9/14/2022

Sheet 2 of 2

Fig 15. Package outline ACC-1230-6F-2 (sheet 2 of 2)

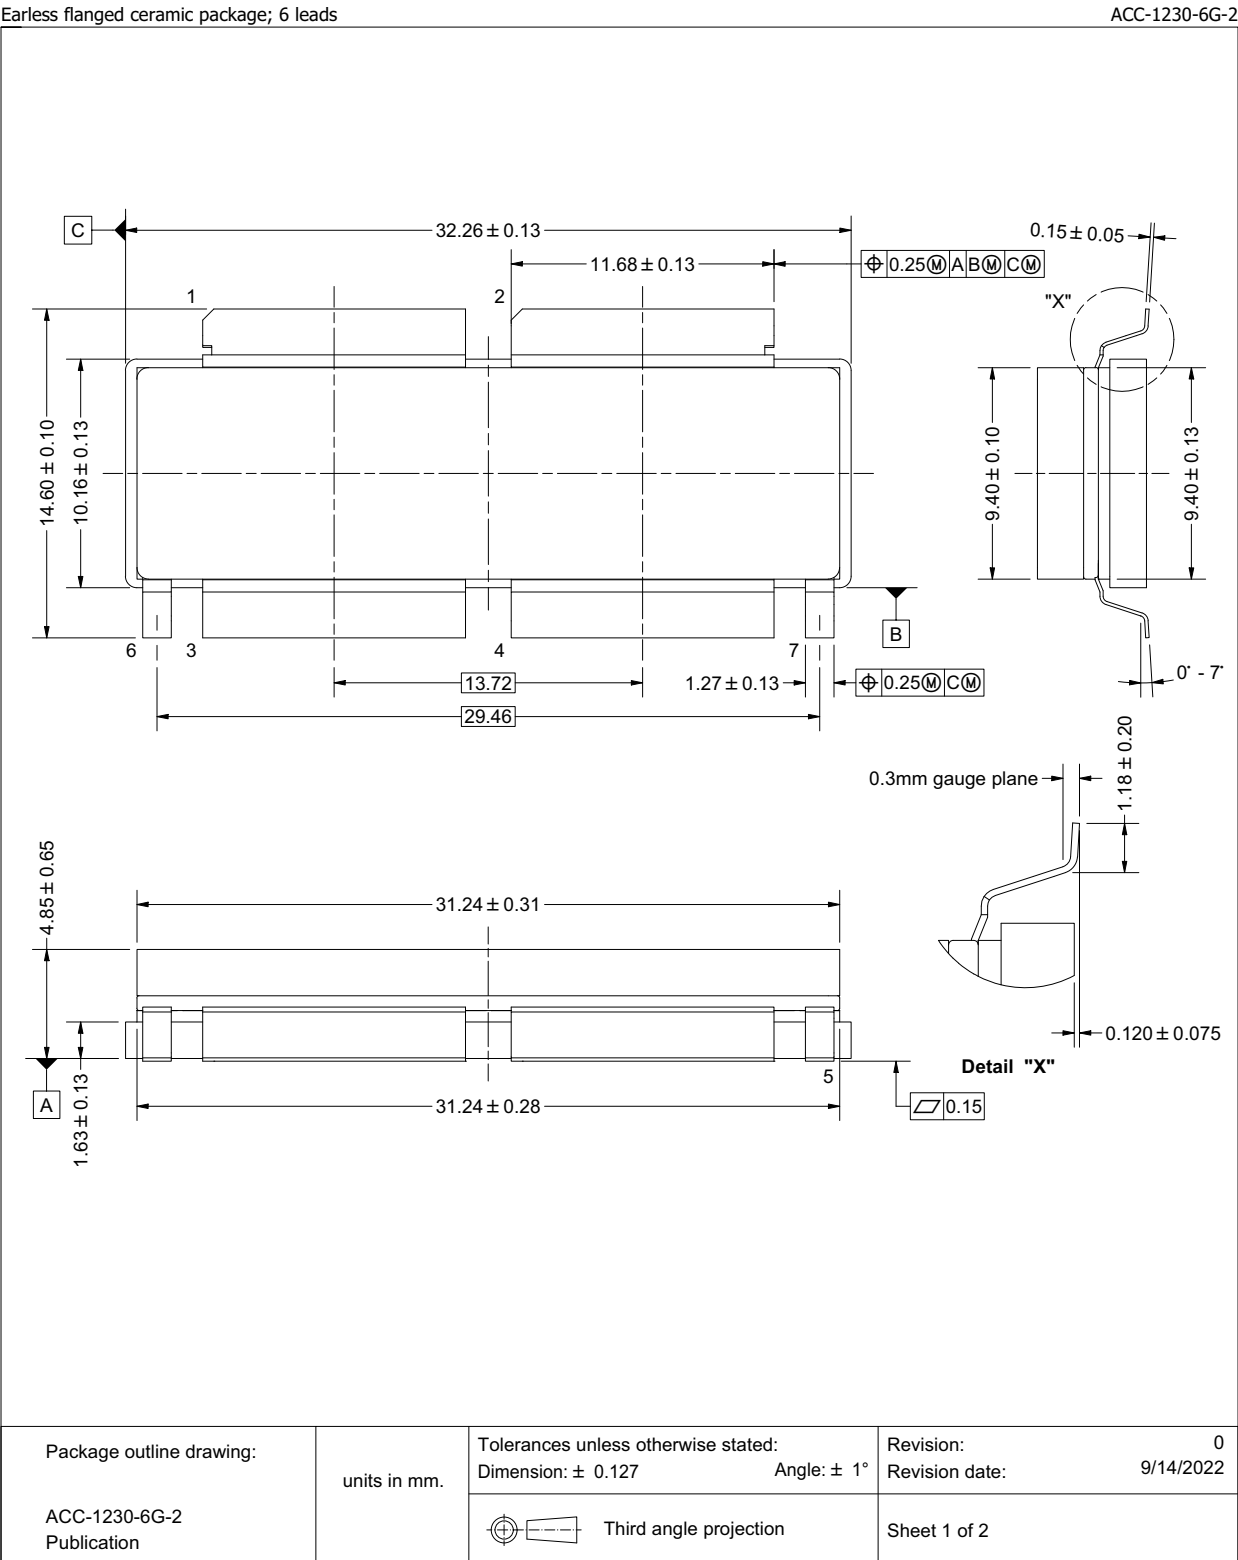


Fig 16. Package outline ACC-1230-6G-2 (sheet 1 of 2)

ACC-1230-6G-2

Drawing Notes					
Items	Description				
(1)	Millimeter dimensions are derived from the original inch dimensions.				


Package outline drawing: ACC-1230-6G-2 Publication	units in mm.	Tolerances unless otherwise stated:	Revision: 0
		Dimension: ± 0.127 Angle: ± 1°	Revision date: 9/14/2022
		 Third angle projection	Sheet 2 of 2

Fig 17. Package outline ACC-1230-6G-2 (sheet 2 of 2)

9. Handling information

CAUTION



This device is sensitive to ElectroStatic Discharge (ESD). Observe precautions for handling electrostatic sensitive devices.

Such precautions are described in the *ANSI/ESD S20.20*, *IEC/ST 61340-5*, *JESD625-A* or equivalent standards.

Table 11. ESD sensitivity

ESD model	Class
Charged Device Model (CDM); According to ANSI/ESDA/JEDEC standard JS-002	C2A
Human Body Model (HBM); According to ANSI/ESDA/JEDEC standard JS-001	2

10. Abbreviations

Table 12. Abbreviations

Acronym	Description
CW	Continuous Wave
ESD	ElectroStatic Discharge
FM	Frequency Modulation
FET	Field-Effect Transistor
ISM	Industrial, Scientific and Medical
LDMOS	Laterally Diffused Metal-Oxide Semiconductor
MRI	Magnetic Resonance Imaging
MTF	Median Time to Failure
RoHS	Restriction of Hazardous Substances
SMD	Surface Mounted Device
UHF	Ultra High Frequency
VHF	Very High Frequency
VSWR	Voltage Standing Wave Ratio

11. Revision history

Table 13. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
ART2K0TFE_2K0TFES_2K0TFEG v.3	20250212	Product data sheet	-	ART2K0TFES_ART2K0TFEG v.2
Modifications:	Table 4 on page 3: updated table			
ART2K0TFE_2K0TFES_2K0TFEG v.2	20240731	Product data sheet	-	ART2K0TFES_ART2K0TFEG v.1
ART2K0TFES_ART2K0TFEG v.1	20230707	Product data sheet	-	-

12. Legal information

12.1 Data sheet status

Document status ^{[1][2]}	Product status ^[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.ampleon.com>.

12.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Ampleon does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Ampleon sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Ampleon and its customer, unless Ampleon and customer have explicitly agreed otherwise in writing. An agreement according to which the functions and qualities of Ampleon products exceed those described in the Product data sheet is invalid.

12.3 Disclaimers

Maturity — After the relevant product(s) have passed the Release Gate in Ampleon's release process, Ampleon will confirm the final version in writing.

Limited warranty and liability — Ampleon uses its best efforts to keep the information in this document accurate and reliable. However, Ampleon gives no representations or warranties, expressed or implied, as to the accuracy or completeness of such information and assumes no liability for the consequences of the use of such information. Ampleon is not liable for content provided by an external information source.

In no event and irrespective of the legal basis (contract, tort (including negligence) statutory liability, misrepresentation, indemnity or any other area of law) shall Ampleon be liable for any indirect, incidental, punitive, special or consequential damages (including but without limitation loss of profit or revenue, loss of use or loss of production, loss of data, cost of capital, cost of substitute goods, property damage external to the Ampleon products and any damage, expenditure or loss arising out of such damage, business interruption, costs related to the removal or replacement of any products or rework charges) or any of the foregoing suffered by any third party.

Notwithstanding any damages that customer might incur for any reason whatsoever, Ampleon's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of Ampleon.

Right to make changes — Ampleon reserves the right to change information including but without limitation specifications and product descriptions published in this document at any time and without notice. This document supersedes and replaces all information regarding these products supplied prior to the publication hereof.

Suitability for use — Ampleon products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Ampleon product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Insofar as a customer or another party nevertheless uses Ampleon products unlawfully for such purposes, Ampleon and its suppliers are not liable for any damages.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Ampleon makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Ampleon products, and Ampleon is not liable for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Ampleon product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers shall provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Ampleon is not liable related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for and shall do all necessary testing for the customer's applications and products using Ampleon products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Ampleon is not liable in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not guaranteed. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Ampleon products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.ampleon.com/terms>, unless otherwise agreed in a valid written individual agreement. In the event of signing an individual agreement the terms and conditions of the respective agreement shall apply. Ampleon hereby expressly objects to and rejects the validity of customer's terms and conditions regarding the purchase of Ampleon products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Ampleon product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Ampleon is not liable for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer breaches this and uses the products for design and use in automotive applications in accordance with automotive specifications and standards, (a) Ampleon gives no warranty, representation

or other guarantees of any kind with respect to such automotive applications, use and specifications, and (b) such use is solely and exclusively at customer's own risk, and (c) customer fully indemnifies Ampleon against any and all liability, damages or failed product claims, including against third parties, arising out of customer's design and use of the product for automotive applications.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

12.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

13. Contact information

For more information, please visit: <http://www.ampleon.com>

For sales office addresses, please visit: <http://www.ampleon.com/sales>

14. Contents

1 Product profile 1

1.1 General description 1

1.2 Features and benefits 1

1.3 Applications 1

2 Pinning information 2

3 Ordering information 2

4 Limiting values 3

5 Thermal characteristics 3

6 Characteristics 4

7 Test information 5

7.1 Ruggedness in class-AB operation 5

7.2 Impedance information 6

7.3 Graphical data thermal sensor 6

7.4 Test circuit 7

7.5 Graphical data 8

8 Package outline 11

9 Handling information 17

10 Abbreviations 17

11 Revision history 17

12 Legal information 18

12.1 Data sheet status 18

12.2 Definitions 18

12.3 Disclaimers 18

12.4 Trademarks 19

13 Contact information 19

14 Contents 20

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.